


Wireless charging instructions:

The internal wireless charging coil position of different mobile phones may be not the same, you can move your phone back and forth to get the ideal charging position.

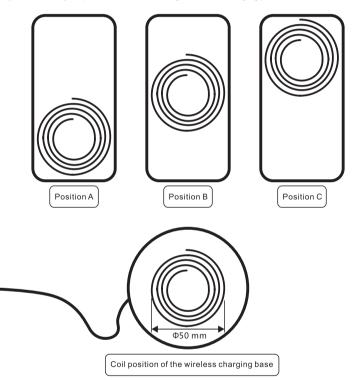

Package Contents:

- ◆ 1 x BESTEK 8-Outlet USB Power Strip
- ◆ 1 x User Manual

Specification:

Input	15A 100-125V~ 60Hz
AC Rated Power	1875W
Output Voltage	USB: 5V=2.4Ax6(Auto) Wireless Charging : 9V=1.1A
DC Rated Power	40W (Total)
Protection function	Surge protection, Short circuit protection, overload protection, over current protection
Insulation strength	Input To Output:1800Vac 1minute ≤10mA Input To FG:1500Vac 1minute ≤10mA
Charging Distance	Up to 5mm (from your device to the top center of the surge protector)
Temperature Protection Range	Output shut down: ≥ 70±5°C Output restart: ≤ 50±5°C
Conversion Efficiency	Max 85%
Working temperature	Operating: -5°C to +40°C. Store: -20°C to +80°C
Working Humidity	Operating: From 10%to90%RH relative humidity (non-condensing). Store: From 5% to 95%RH relative humidity (non-condensing).
Cord Length	6ft
Dimension	4.81×4.81×5.72 inches
Weight	34.64 ounces

Warning:

- Indoor use only.
- Do not operate the power strip near the rain or wet areas.
- Do not operate the power strip if liquid of any kinds is spilled onto or inside the unit.
- Do not expose the power strip to direct sunlight or place it near wall heaters, space heaters, or enclosed space prone to temperature increase.
- ◆ Do not disassemble or repair(if not professional).
- ◆ Do not bend the pins of the plug.
- Please keep the power strip away of children.
- The BESTEK USB power strip requires a properly grounded outlet for safety and to protect
 the connected equipment. Please ensure your home's/office's electrical wiring has a proper
 grounding.

Note:

- ◆ Please make sure the diagnostic lights are on, indicating that incoming AC wall power is safe(the "Protected" and "Grounded" indicators should be lit whenever the unit is on).
- Please press the "Reset Button" to restore electricity of the AC outlets in the event of overload or short circuit.
- Please use this power strip within specified voltage and current range.
- It's normal for the power strip to be a little warm when you use it to charge multiple devices.
- When your device's battery is fully drained, it may be charged a little slower at the beginning because of the battery protection from your device.
- Please check that your phone, tablet and other devices are used in accordance to your devices' user manual instruction.
- Due to the fact that charging distance is limited to 5mm and wireless charging uses magnetic
 induction, your phone case should NOT be too thick(less than 2mm) or have any metal or
 magnetic materials.
- ◆ Do not place metal objects on top of the product when power is applied.
- Please consult your mobile phone manufacturer before using an external wireless charging receiver.
- Unauthorized disassembly of any parts of this surge protector is forbidden and will void the warranty.

Troubleshooting:

- ◆ When your phone can not be wirelessly charged, please remove your phone and re-position it.
- When the charging temperature is high, please remove the phone and re-position it.
- When your phone can not be wirelessly charged, please try disconnecting the power for 2 seconds and then re-power it.

Warranty:

 All BESTEK products come with a 30 day money-back guarantee, an 18-month warranty, and a lifetime of friendly customer service!

Contact Us:

If there is any quality-related issue or requirement about our product, please contact us via Amazon buyer-seller message portal, or by e-mailing customers.us@bestekcorp.com

BESTEK GLOBAL LLC 1290E ELM ST, #A-8, ONTAIRO, CA91761 COMPANY: BESTEK PHONE: 909-816-0181

MADE IN CHINA